



US006021155A

United States Patent [19]

[11] **Patent Number:** **6,021,155**

Jones

[45] **Date of Patent:** **Feb. 1, 2000**

HEAT TREATING FURNACE SYSTEMS 4,608,698 8/1986 Moller et al. 373/130


[76] Inventor: **William R. Jones**, PO Box 205,
Telford, Pa. 18969

4,608,698 8/1986 Moller et al. 373/130
4,612,651 9/1986 Moller et al. 373/130
5,497,394 3/1996 Jhawar et al. 373/130

[21] Appl. No.: **09/306,217**

Primary Examiner—Tu Ba Hoang

[57] **ABSTRACT**

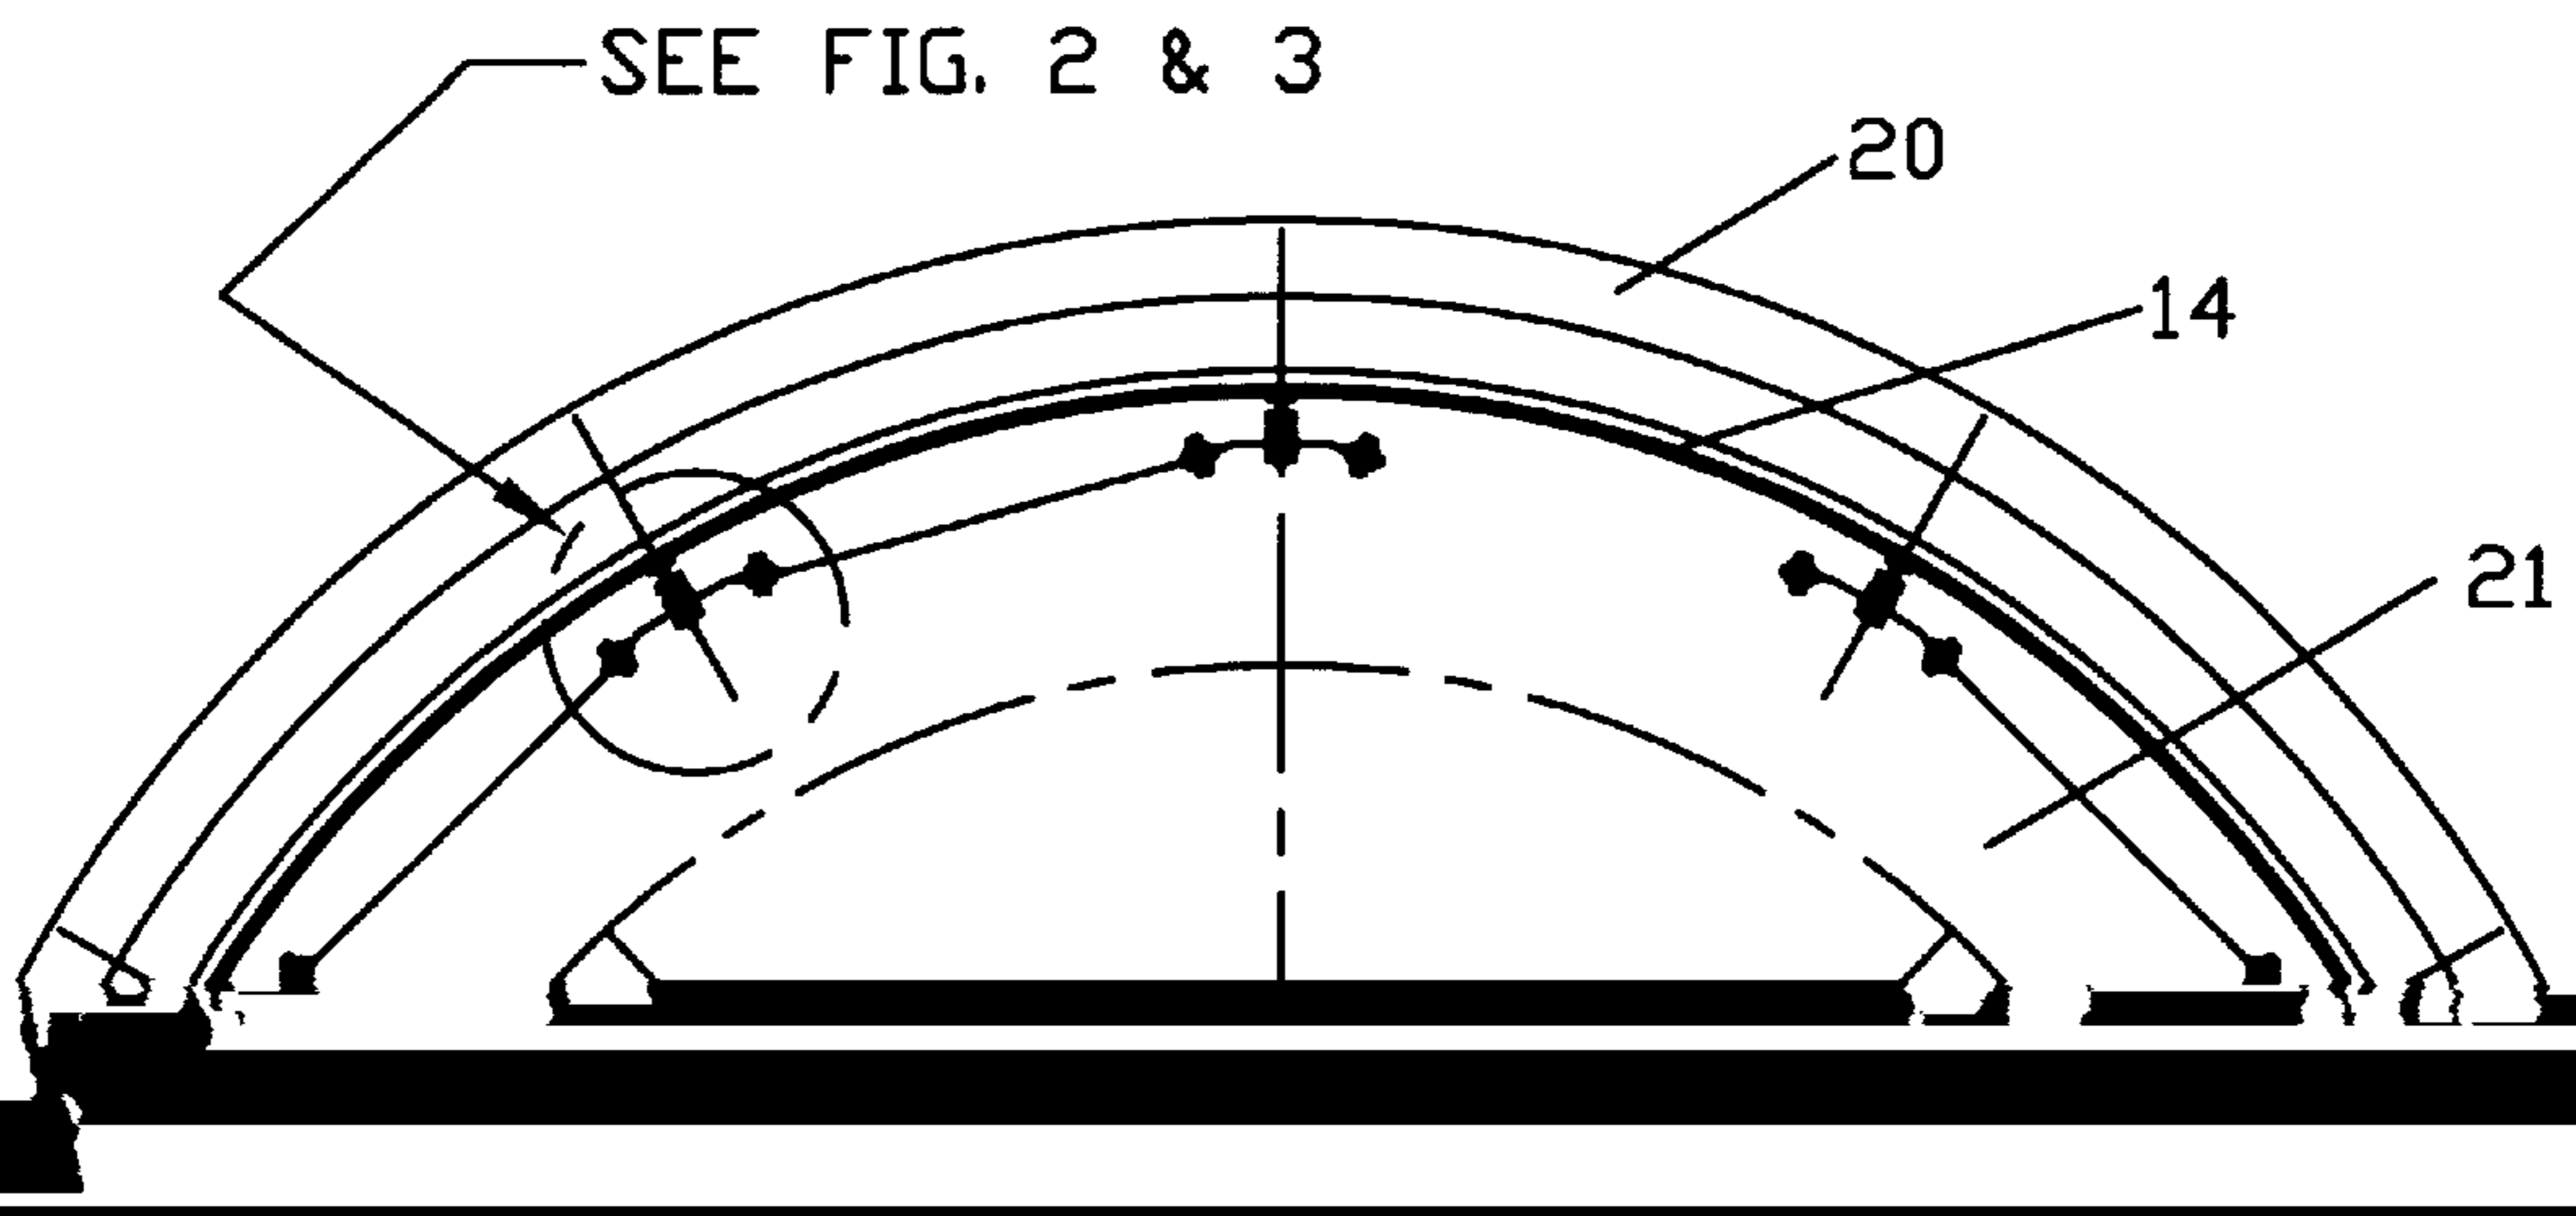

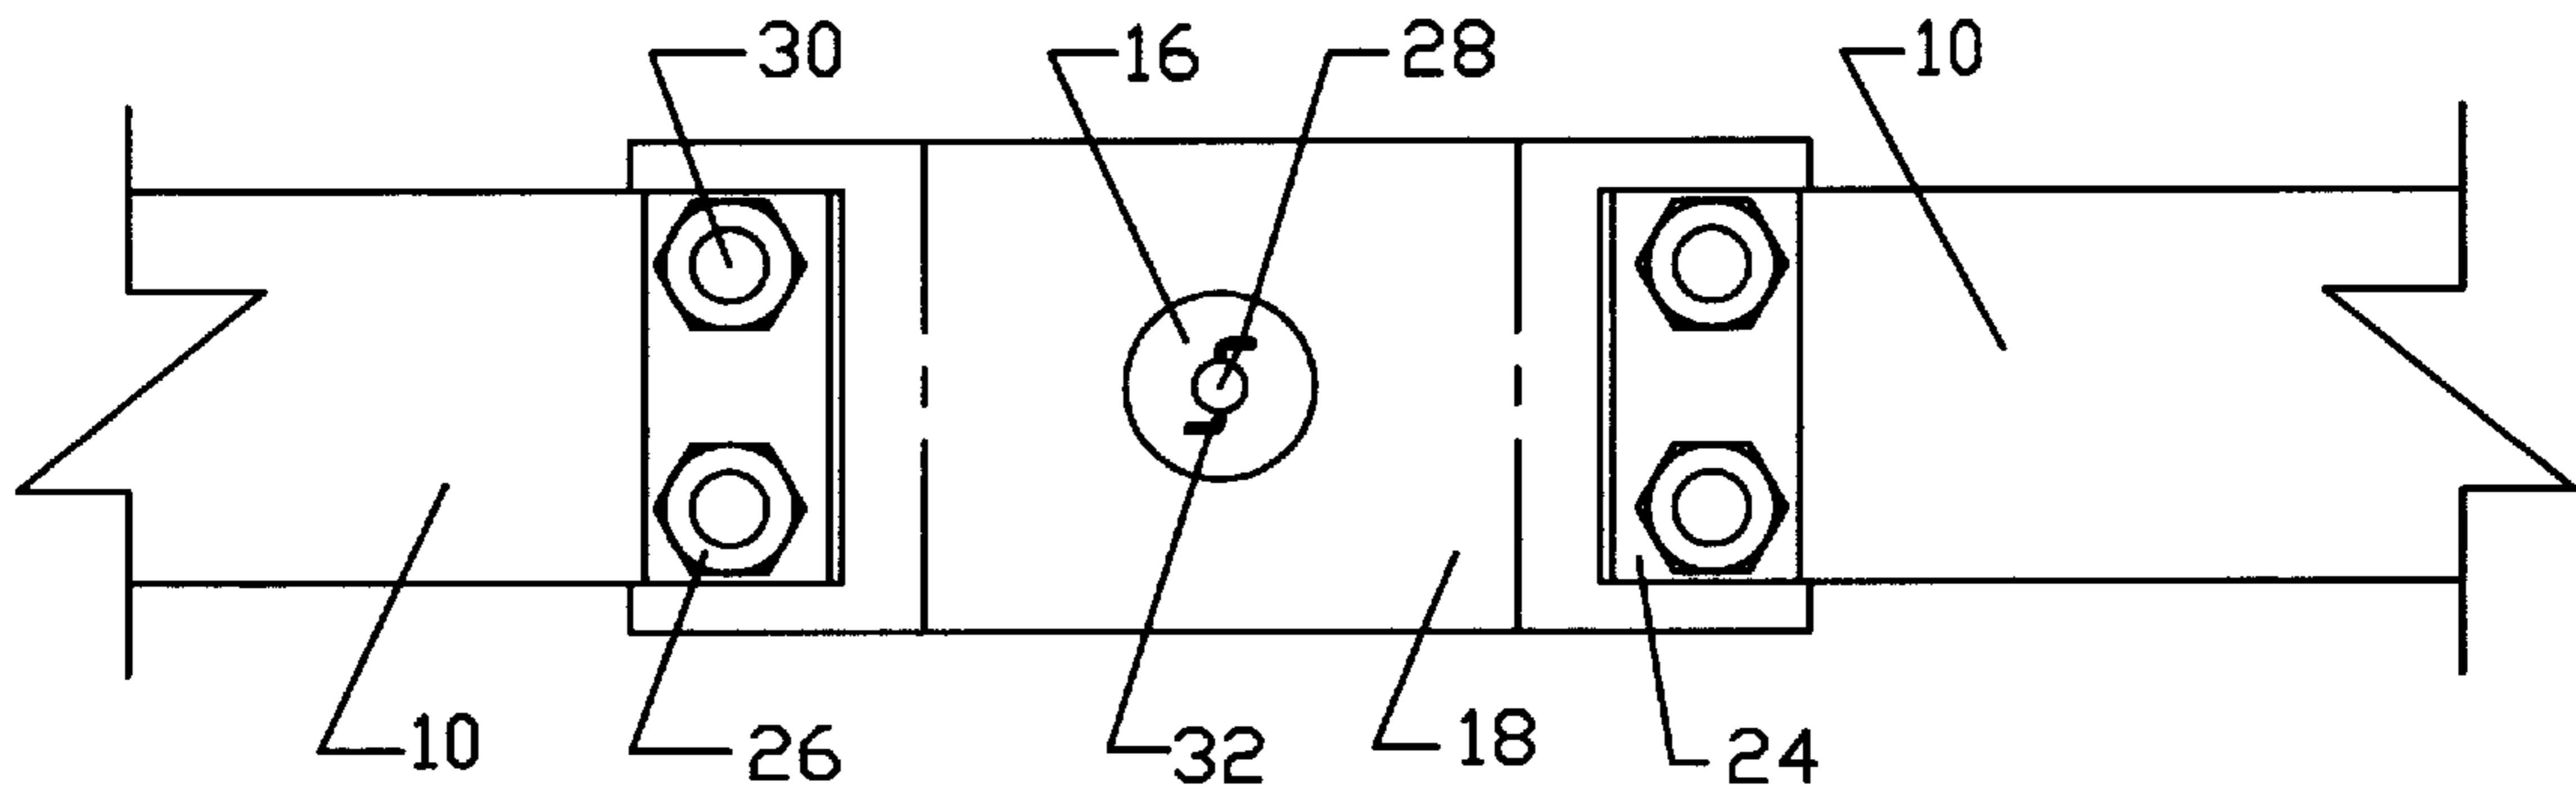


FIG. 2

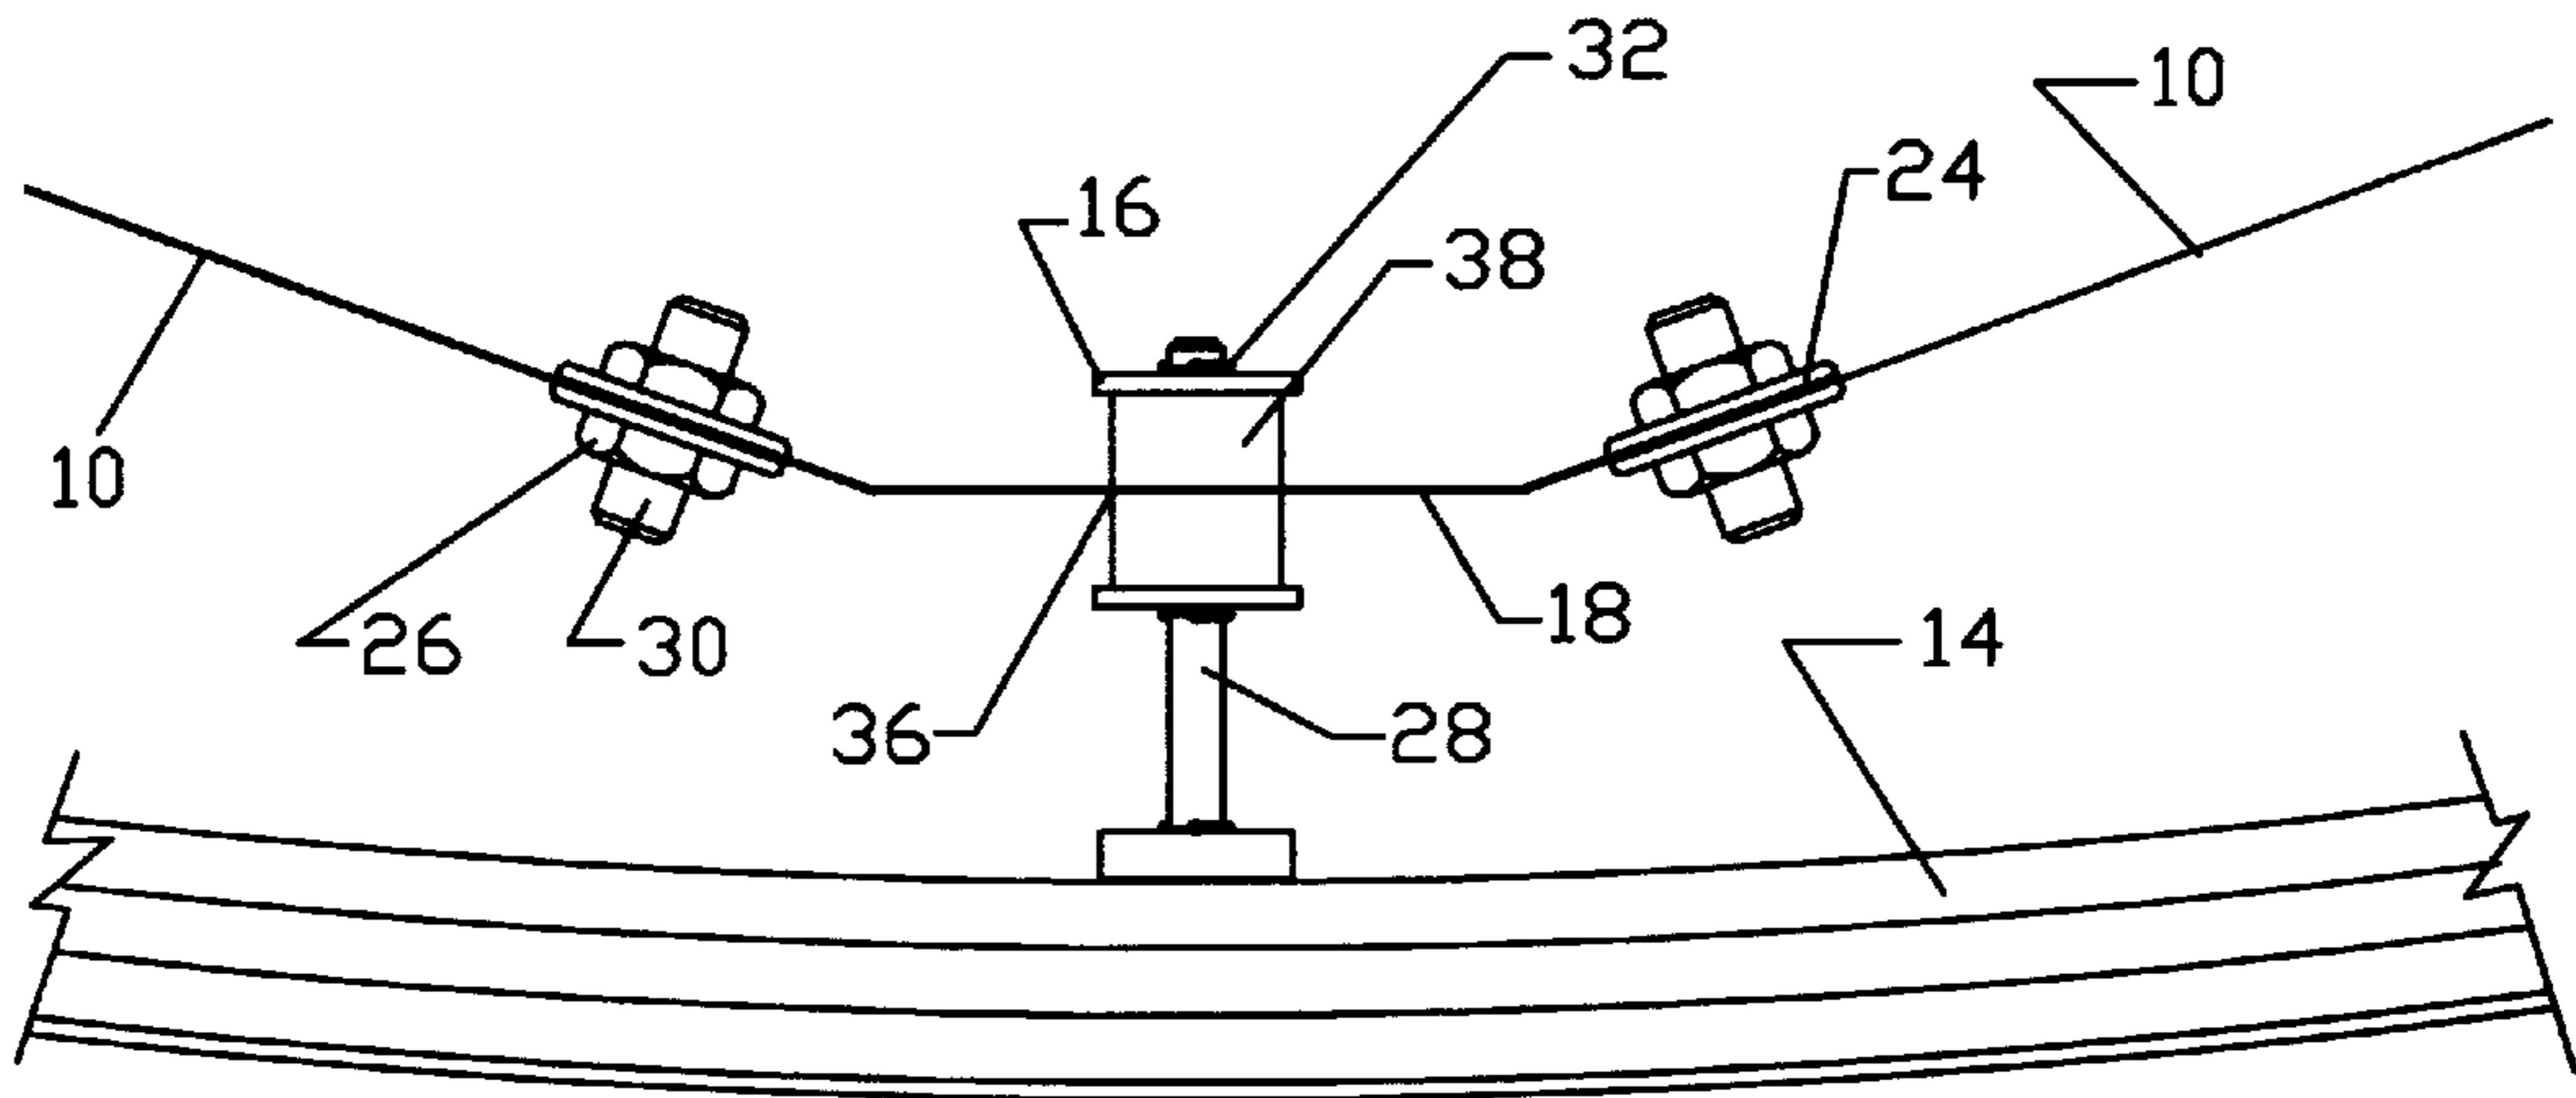


FIG. 3

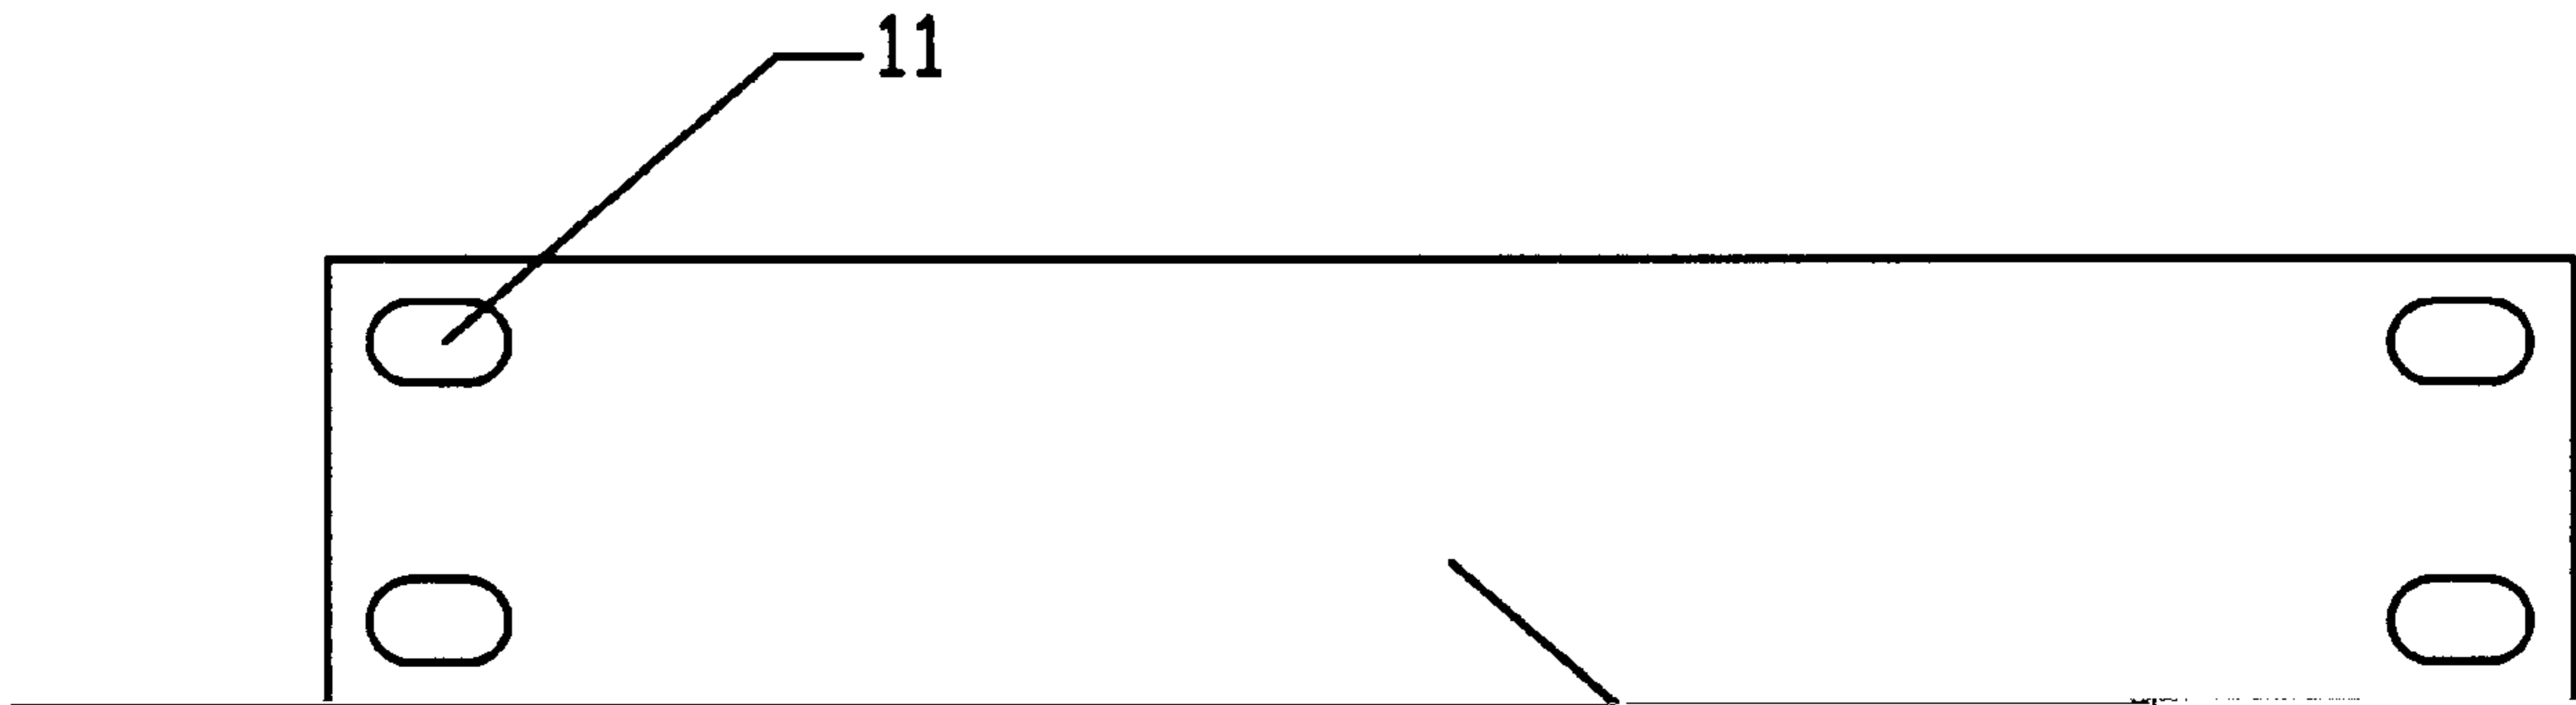


FIG. 4A

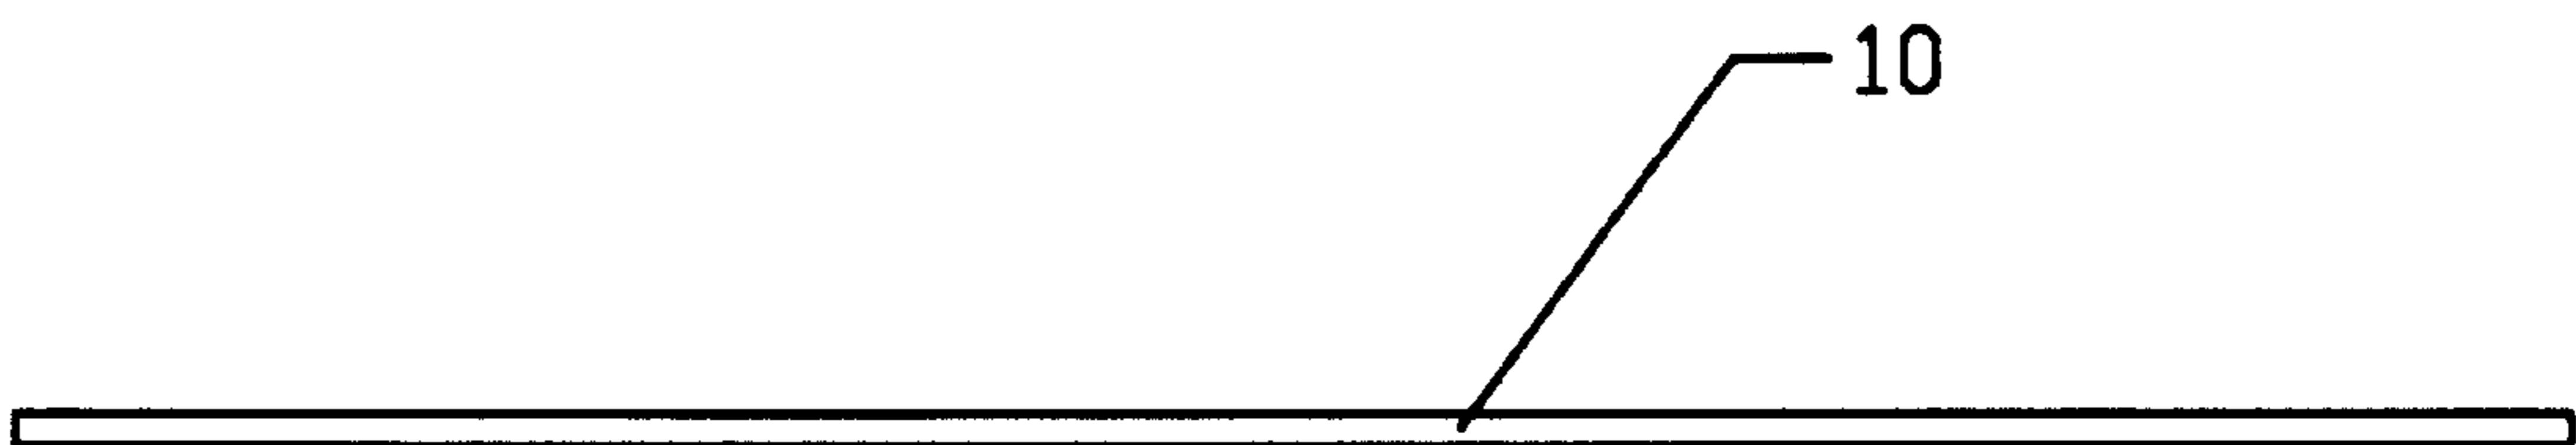


FIG. 4B

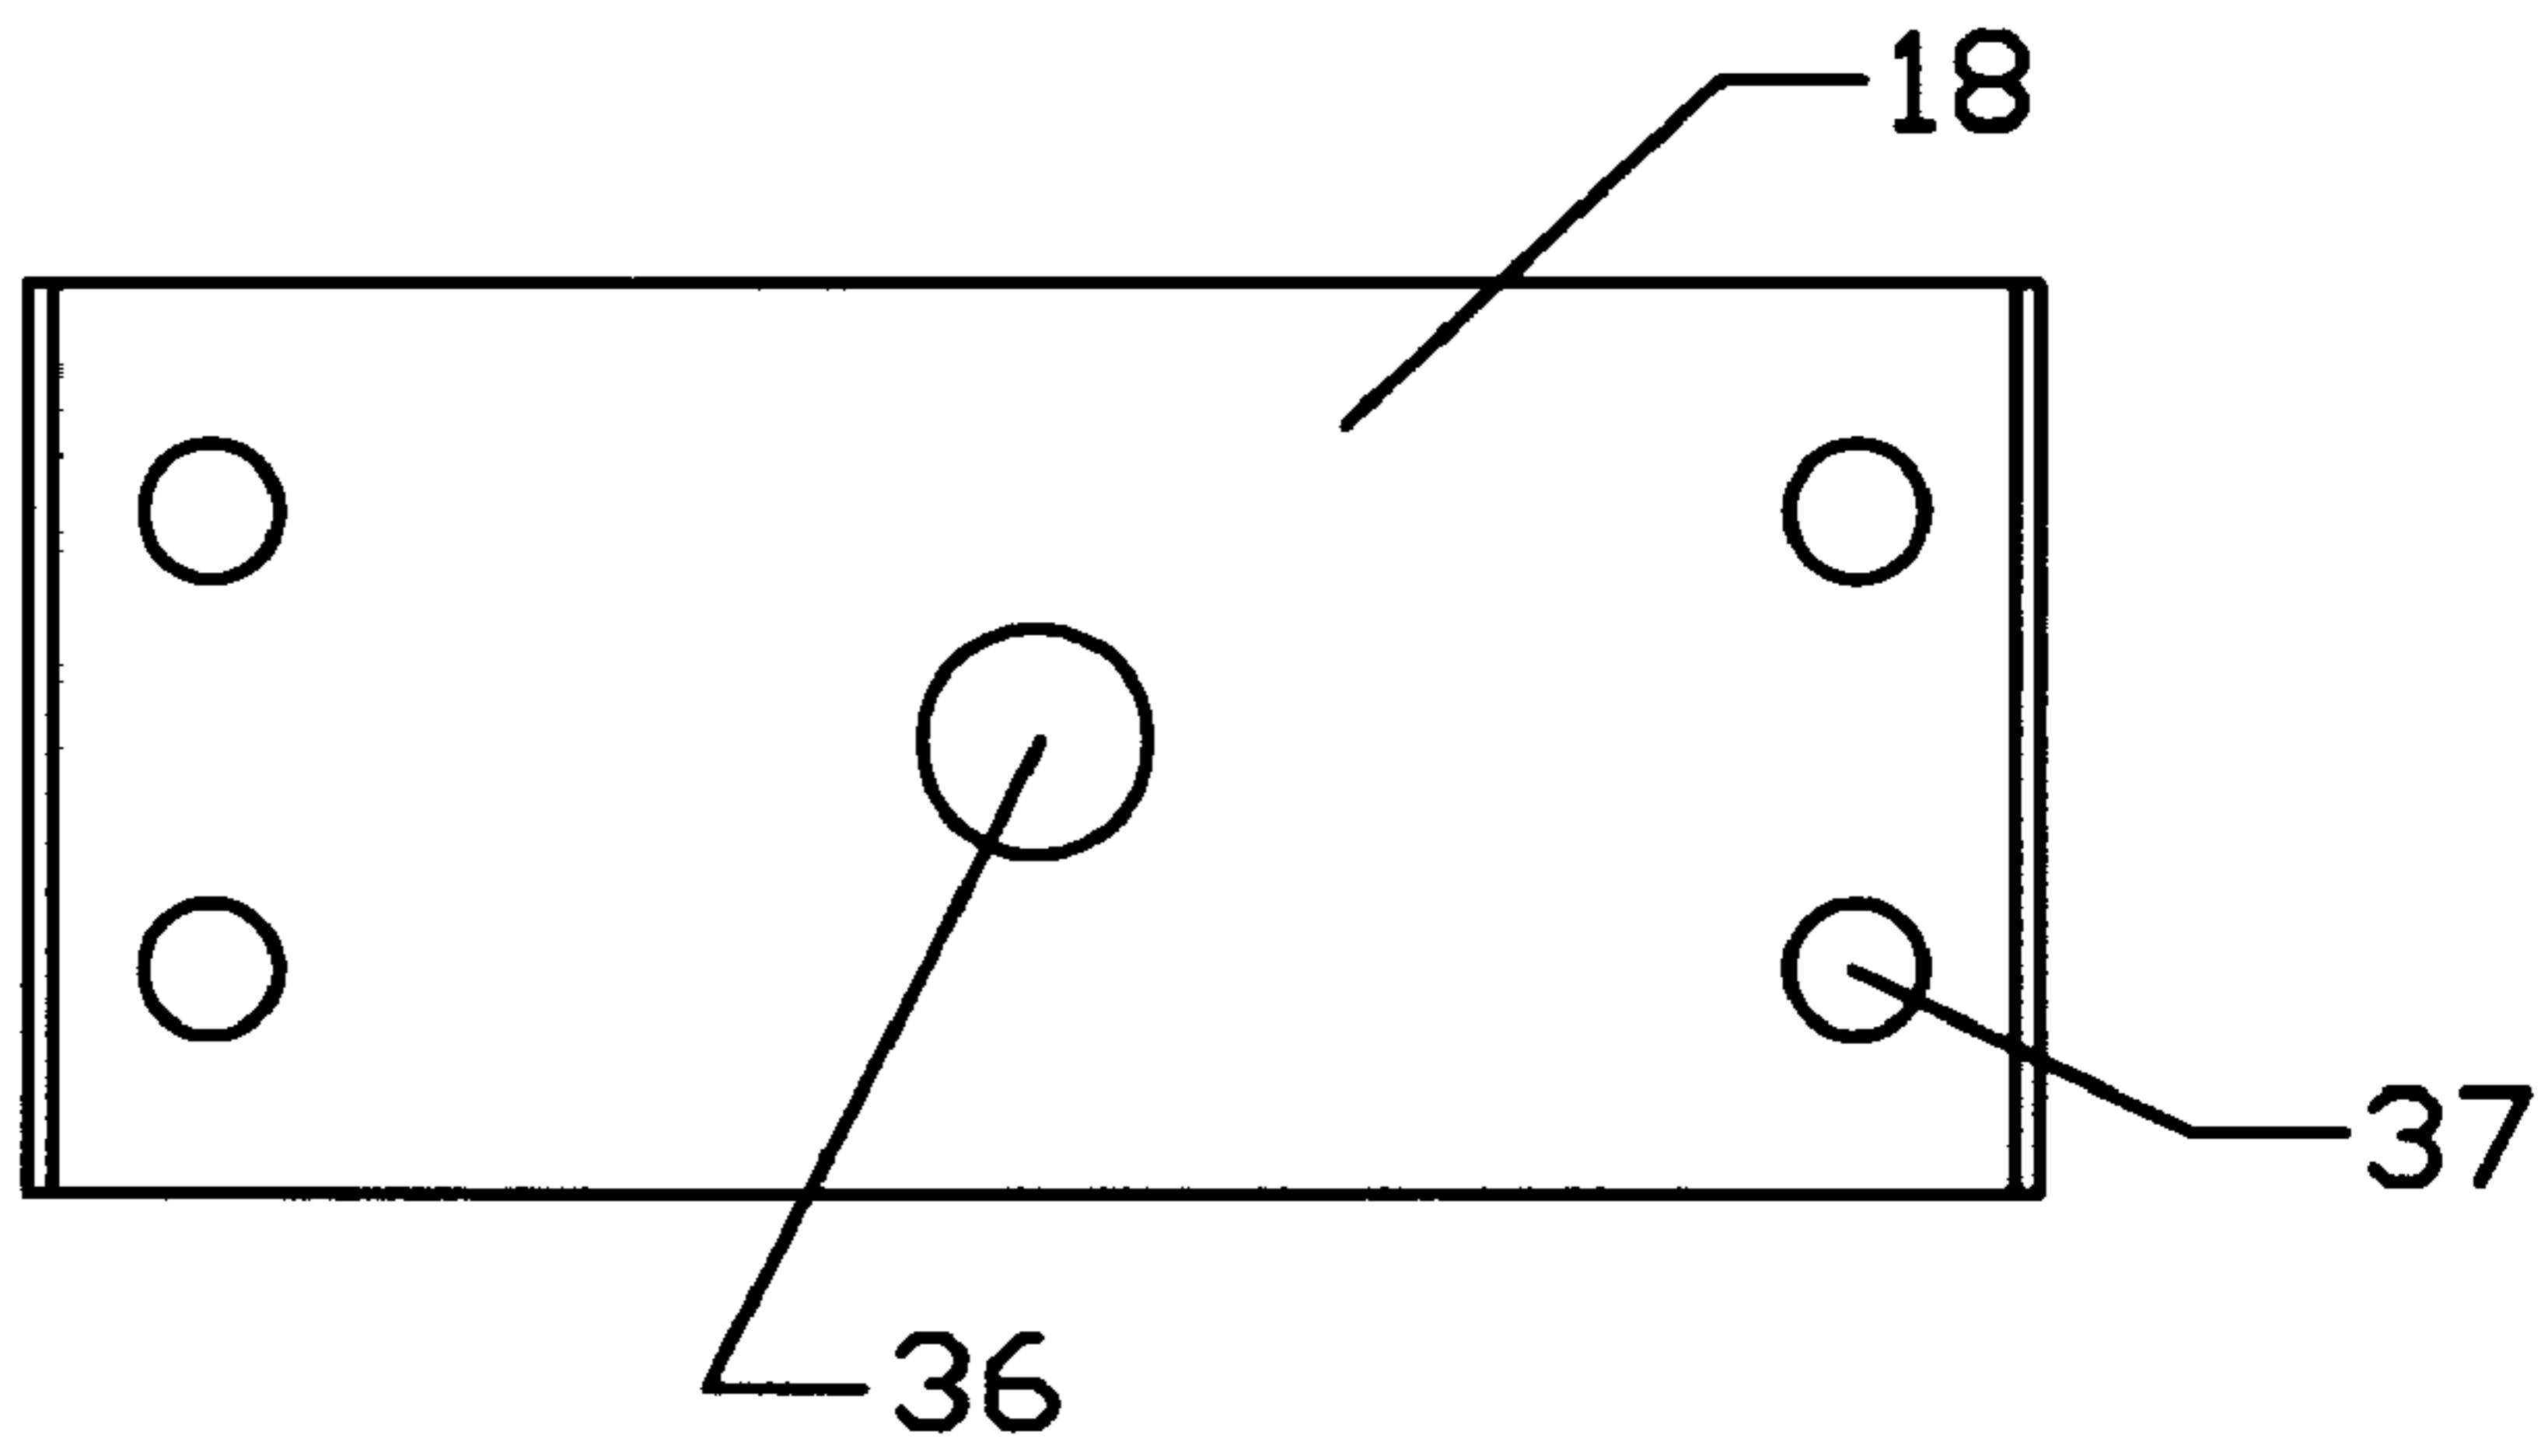


FIG. 5A

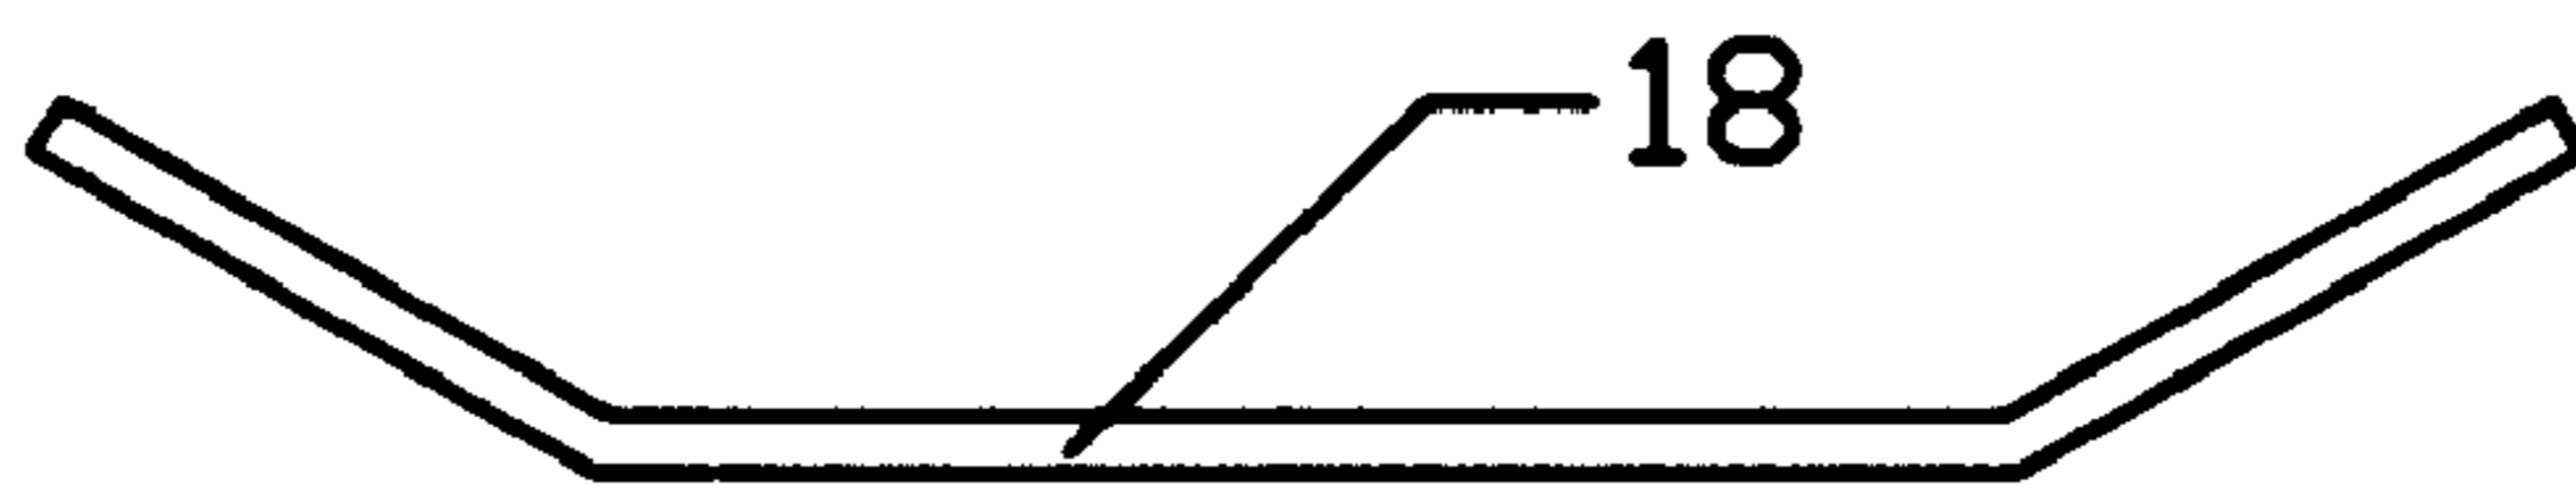


FIG. 5B

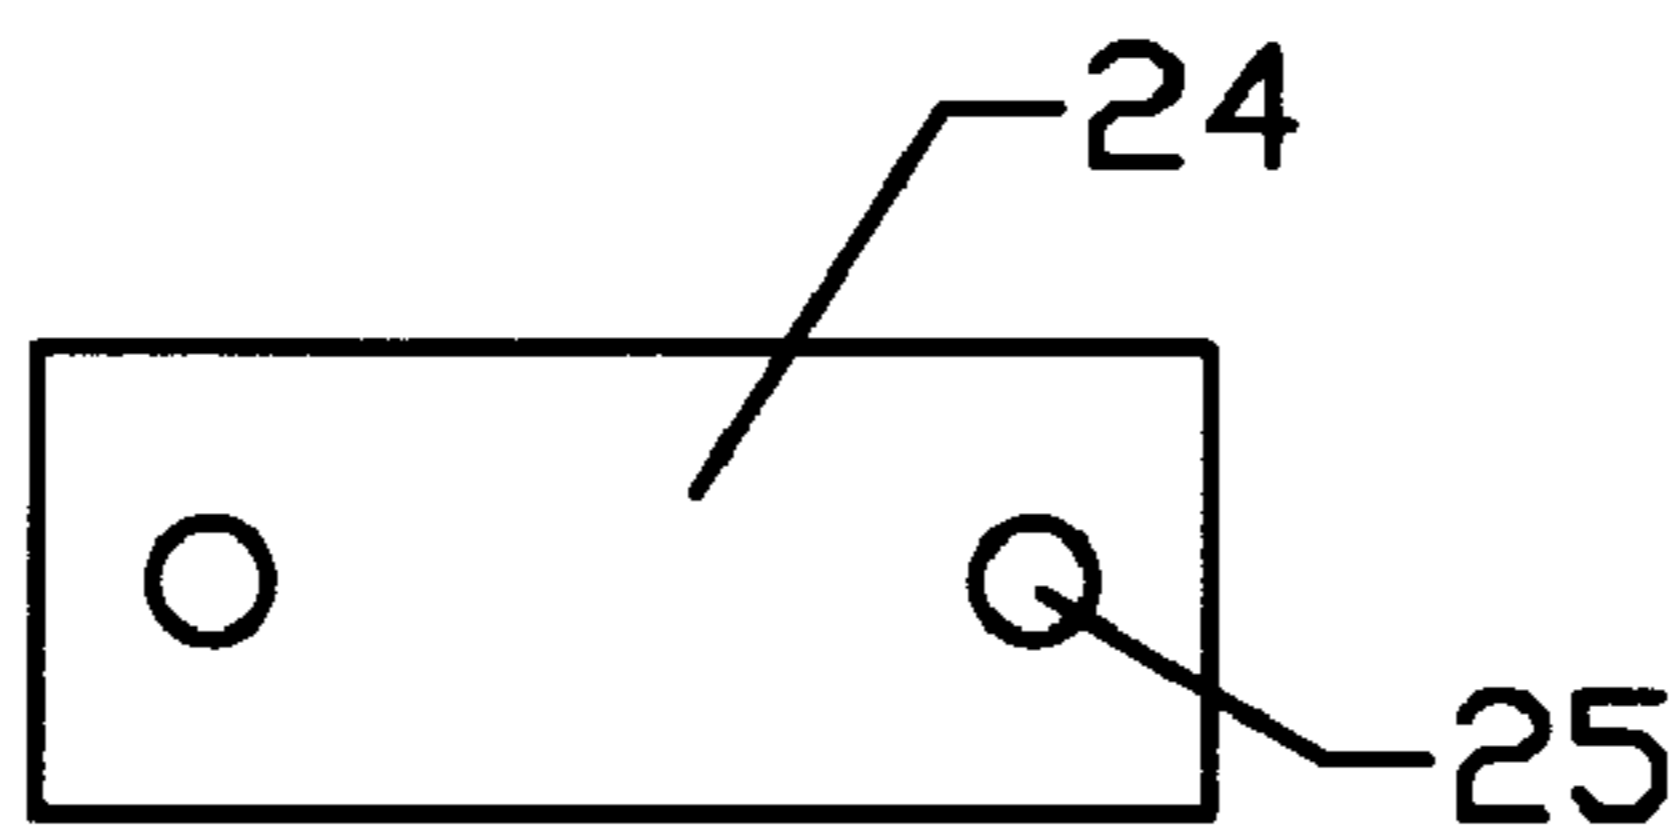


FIG. 6A



FIG. 6B

REF. TO DRAWING FIG. 1 OF DRAWING

FIG. 1 OF DRAWING

IMPROVED HOT ZONE

This invention is a continuation-in-part of U.S. Pat. No. 3,111,111, filed Feb. 22, 1964, and is hereby incorporated by reference.

contoured to provide a shape to the polygon, for example an octagon or pentagon. The polygons are connected to the inner wall of the hot zone chamber by a plurality of support

10 to the preferred compensator bar **18** and stabilizer bars **24** through their own mounting holes **37** and **25** respectively as

disposed or approach the vertical. The advantages of using this (high width to thickness aspect ratio) elements had

compensator bars arranged to shape said polygons, a sub-

than about 53 and greater than about 15.